


RG Series

HYDRAULIC REMOVABLE

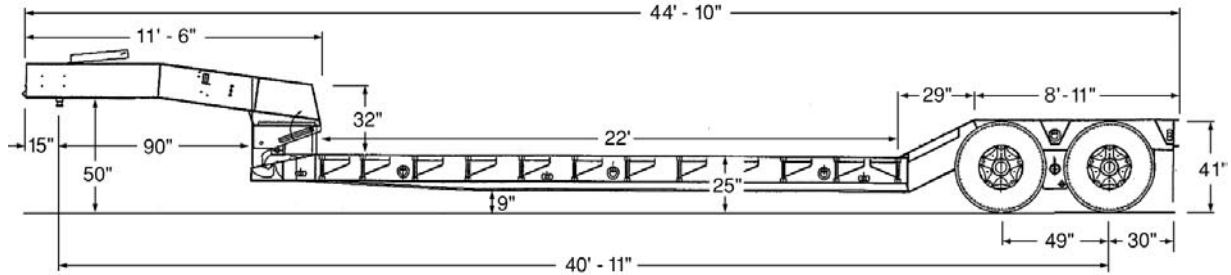

TANDEM AXLE MODEL SHOWN

STANDARD RG SERIES FEATURES

- Hi-Tensile steel with full width cross members
- 22' loadwell with 24 12" outriggers, 2" lumber decking & 3 "D" lashing rings
- 5" axles; 16-1/2" x 7" air brakes; unimount 10 stud
- High capacity spring suspension
- Self-contained hydraulic system w/electric start engine
- Rubber-mounted lights
- Finished with industrial enamel over prime coat; color of your choice from our standard color selection.
- Scraper neck and tapered front beam

AVAILABLE TIRE SIZES

- 10:00x20 (spoke only); 11:00x22.5 bias (budd/spoke); 11:00R 22.5 (budd/spoke); 255/70R 22.5 (budd/spoke)

AVAILABLE OPTIONS

- Non ground bearing gooseneck
- Extra deck & gooseneck length
- Flip or lift axles
- 15" axles with 12-1/4" x 7-1/2" brakes
- Special wheel ends
- Suspensions: air-ride & other special requirements
- Wet line and/or combination hydraulic system
- Fenders: Gooseneck & Load-bearing rear fenders
- Additional hydraulic cylinders
- Lockable storage in neck, bed or tail
- Ramps: Front - flip
Rear - hydraulic & spring assisted manual
- Side channel reinforcement
- Extra "D" lashing rings
- Special deckings
- Beaver tail
- Bucket well

| Model | Capacity | No of Axles | Deck Length | LOA |
|-------|----------|-------------|-------------|---------|
| RG-35 | 70,000# | 2 each | 22' | 44'-10" |
| RG-40 | 80,000# | 2 each | 22' | 44'-10" |

NOTES:



Rugged Durability, Performance, Value.

6101 South McIntosh Road, Sarasota, Florida 34238 • For additional information or your Witzco Challenger dealer nearest you, Call: (941) 922-5301 • Toll Free: 1-888-922-9900 • Fax: (941) 924-2402 • E-mail: info@witzco.com • Website: www.witzco.com

NOTE: specifications subject to change without notice. All dimensions ± "